

Unit 11, Gunnels Wood Park, Stevenage, Hertfordshire SG1 2BH Sales@elecro.co.uk | +44 (0) 1438 749474 www.elecro.co.uk



H.R.UV-C

The super reflective properties of the Elecro H.R.UV-C optimises the UV-C radiation and dramatically increases the performance.





FEATURES

- Highest UV reflective index on the market equating to supreme efficiency
- E-PTFE reaction chamber is extremely repellent, maintaining UV reflectivity
- Up to 95% reflection amplifying the exposure of microorganisms to UV
- · No harmful gases or by-products produced
- Neutralises bacteria, viruses, algae and fungai that traditional chemicals cannot


- Optional smart peristaltic dosing system for chlorine/hydrogen peroxide
- Powerful sterilisation and eliminates the smell of chlorine
- · Average lamp life expectancy: 2 years
- · Equipped with intelligent lamp life indicator
- · Salt and sea water compatible

TECHNICAL DRAWINGS








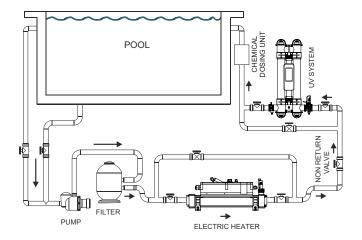

PRESSURE DROP

PRESSURE DROP PRIMARY CIRCUIT

PRESSURE (BAR)

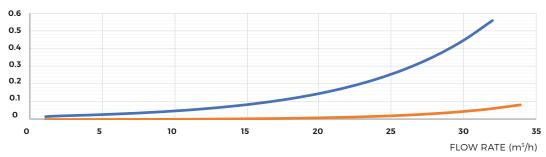



SPECIFICATIONS

POWER SUPPLY	Single phase 100V ~ 240V			
MIN. FLOW RATE	4m³/h			
MAX. FLOW RATE	Single Tube: 21,000 litres per hour; 21 m³/h Double Tube: 42,000 litres per hour; 42 m³/h			
MAX. POOL SIZE	Single Tube: 50,000 litres; 50m³ Double Tube: 100,000 litres; 100m³			
MAX. POWER CONSUMPTION	Single Tube: 64W Double Tube: 128W			
LAMP	Low pressure / high output			
LAMP LIFE	9,000 hours			
DOSING RATE	Exceeds the equivalent of 30mj/cm² at max. flow rate			
INGRESS PROTECTION RATING	IP64			
FREQUENCY	50/60 Hz			
WORKING PRESSURE	3 Bar maximum			
WATER CONNECTIONS	2" / 63mm stepped ABS unions + reducers 1½" / 50mm			
SALT WATER	100% sea water safe			
MOUNTING	Floor or wall mounting			
OXIDISATION PROCESS	UV			

MODELS

100-240V 1-PHASE	MAX. POOL VOLUME	PRODUCT CODES			FEATURES	NET WEIGHT	GROSS WEIGHT	VOLUME
Lamp Output	m³	UK Plug Type G	Euro Plug Type F	USA Plug Type B	FEATORES	kg	kg	m³
55 WATTS	50	HR-55-UK	HR-55-EU	HR-55-USA	Analogue lamp life indicator & reset switch	6.6	9.2	0.11
110 WATTS	100	HR-110-UK	HR-110-EU	HR-110-USA	Analogue lamp life indicator & reset switch	10.4	13.9	0.15
55 WATTS	50	HRP-55-UK	HRP-55-EU	HRP-55-USA	Digital lamp life countdown with intelligent dosing pump	6.9	9.6	0.11
110 WATTS	100	HRP-110-UK	HRP-110-EU	HRP-110-USA	Digital lamp life countdown with intelligent dosing pump	10.9	14.3	0.15